


Multi-conductor Cable



UL2468 Flat Ribbon Wire

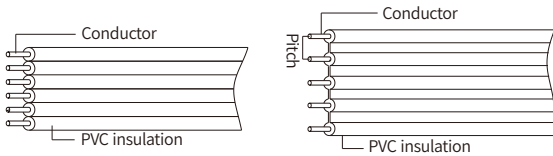

Product Description

- Tinned, annealed, stranded or solid copper conductor.
- Rated temperature: 80°C or 105°C
- Rated voltage: 300Volts
- Pass UL VW-1&CSA FT1, FT2 vertical flame test

Applications

- For use in internal wiring of appliances, computers.

Technical Data

UL Style& CSA Type	Gauge	Conductor No./OD	Pitch mm	Cores No.	Insulation Thickness mm	Overall Diameter mm	Conductor Resistance at 20°C
	AWG	No./mm					Ω/KM
UL2468 CSA AWM I/A	24	7/0.20 or 11/0.16	1.6 or 1.5	2	0.45	1.5×4.7/4.5	94.20
				3		1.5×4.7/4.5	
				4		1.5×6.3/6.0	
				5		1.5×7.9/7.5	
				6		1.5×9.5/9.0	
				7		1.5×11.1/10.5	
				8		1.5×12.7/12	
				9		1.5×14.3/13.5	
				10		1.5×15.9/15	
				11		1.5×17.5/16.5	
				12		1.5×19.1/18	
UL2468 CSA AWM I/A	24	7/0.20	2.00	2	0.45	1.5×3.5	94.20
				3		1.5×5.5	
				4		1.5×7.5	
				5		1.5×9.5	
				6		1.5×11.5	
				7		1.5×13.5	
				8		1.5×15.5	
				9		1.5×17.5	
				10		1.5×19.5	
				11		1.5×21.5	
				12		1.5×23.5	
				13		1.5×25.5	
				14		1.5×27.5	
				15		1.5×29.5	
				16		1.5×31.5	
				17		1.5×33.5	