


M8 2P Connectors, Cable Assembly, Male Straight Shielded

Male

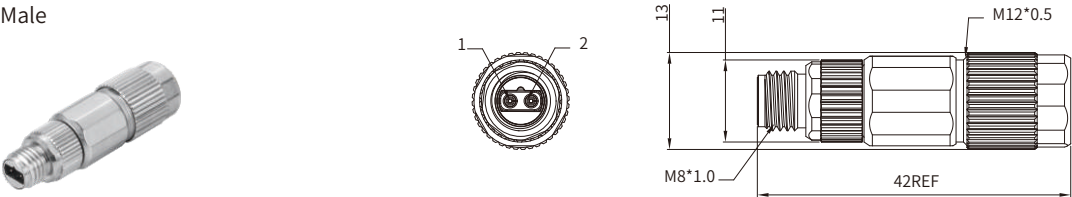

RoHS 

Specifications

Contacts	2
Pinlayout(Male)	
Standard	IEC 63171-6-2021
Ambient temperature	-40°C~+80°C
Connector insert	PA
Connector contacts	Brass with gold plated
Connector shield	Zinc alloy
Insulation resistance	≥500 MΩ
Contact resistance	≤20 mΩ
Shielding	Available
IP rating	IP67
Mating endurance	>500 cycles
Insertion/withdrawal force	50N Max.
Rated current	4A
Voltage	60VD/C
Wire gauge/size	0.34mm²(AWG 22)

Part Number

Pins	Male
2	SPEB08MCSFF02ST

Assembly Instruction

